



Bluetooth Digital Multimeter

- + data transferring via Bluetooth, interacting with mobile device to read / analyze transferring data
- + $3\frac{5}{6}$ - digit full scale reading, achieving higher measurement accuracy than $3\frac{3}{4}$ - digit counterparts
- + larger display, easier data-reading; simulated bar chart comes as an added option
- + multi-connection (more than one device) supported via mobile app
- + temperature detecting function
- + backlit-powered screen, more suitable for dark measurement environment
- + smart power-off option extending battery life
- + smart voice-reading accessible
- + true RMS value available (only in B35T, and D35T)

owon® created by LILLIPUT®

Fujian Lilliput Optoelectronics Technology Co., Ltd.

The Mansion of Optoelectronics, Hengsan Road
Lantian Industrial Zone, Zhangzhou 363005 P.R. China
Tel : +86.596.213.0430 Fax : +86.596.210.9272


Xiamen Lilliput Technology Co., Ltd.

5/F, Bldg. B, Chuangxin Plaza
Software Park Phase I, Xiamen 361005 P.R. China
Tel : +86.592.257.5666 Fax : +86.592.257.5669

WWW.OWON.COM.HK | WWW.OWON.COM.CN



mobile app accessible via scanning QR code

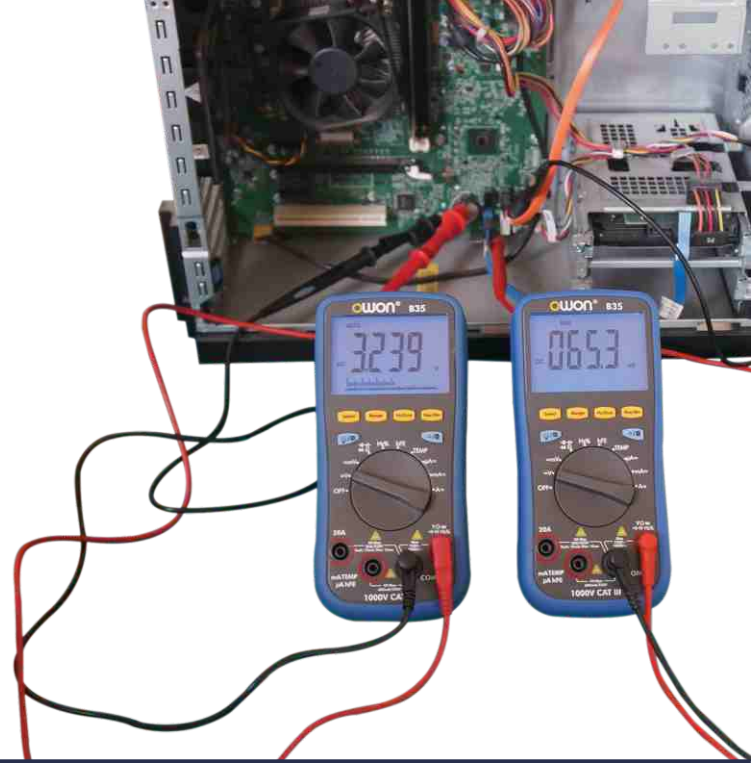

1st remote-control-accessible BDM, data-measuring, and setting realized through app device ; more than one device could be monitored via app device.

1. flexible on-off backlit screen, saving battery energy

2. $3\frac{5}{6}$ BDM - higher measurement accuracy than $3\frac{3}{4}$ multimeter




when measuring value larger than 3999, the $3\frac{3}{4}$ digit multimeter only typing 2 decimals, whereas $3\frac{5}{6}$ BDM could do 3 decimals, exporting more accurate measurement value.

3. more than one BDM could be connected via app device, when connecting, the name of BDM is under customized, and memorized, easier for next use



4. the chart mode for measuring-data, the zoom option simplifying data comparison, and analysis. CSV format data export is possible.

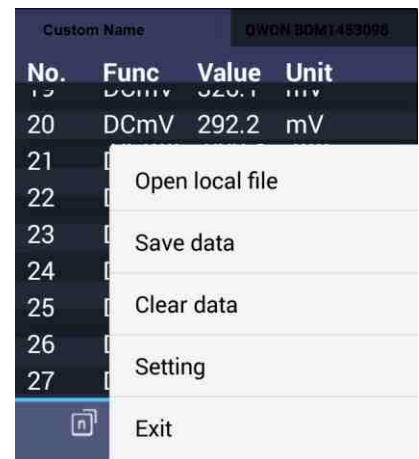

5. knowing the measurement value via voice-reading



the function activated after TTS voice pack installed, which frees the eye-watch, making on-site measurement more comfortable

6. app software online upgrade accessible



Performance Specifications

	Measurement Range	Accuracy
DC Voltage	60.00mV / 600.0mV / 6.000V / 60.00V / 600.0V / 1000V	±(0.6%+1 digit)
AC Voltage	60.00mV / 600.0mV / 6.000V / 60.00V / 600.0V / 750V	±(0.6%+3 digit)
DC Current	600.0uA / 6.000mA / 60.00mA / 600.0mA / 6.000A / 20.00A	±(0.8%+1 digit)
AC Current	600.0uA / 6.000mA / 60.00mA / 600.0mA / 6.000A / 20.00A	±(0.8%+1 digit)
Resistance	600.0Ω / 6.000kΩ / 60.00kΩ / 600.0kΩ / 6.000MΩ / 60.00MΩ	±(0.6%+1 digit)
Capacitance	40.00nF / 400.0nF / 4.000uF / 40.00uF / 400.0uF / 4000uF	±(1.5%+3 digit)
Frequency	9.999Hz / 99.99Hz / 999.9Hz / 9.999kHz / 99.99kHz / 999.9kHz / 9.999MHz	±(0.6%+2 digit)
Temperature	-100.0°C ~ +400.0°C	±(2%+2 digit)

Model	D35	B35	D35T	B35T
Display	6000 count			
Bluetooth Module	×	√	×	√
True RMS	×	×	√	√
Auto-scale	√			
Frequency	40Hz ~ 400Hz			
Duty Cycle	0.1% ~ 99.9%, ±2%			
Diode Test	√			
Audion Test	√			
Auto Power-off	√			
On-off Warning	√			
Low-battery Indicator	√			
Data Hold	√			
Relative Measurement	√			
Max / Min Value	√			
LCD Backlight	√			
Input Impedance	10MΩ			
Battery	3V (1.5V×2)			
LCD Size	69 x 52 mm			
Display Area	67 x 46 mm (effective area 66 x 45 mm)			
Weight (without package)	0.32 kg			

Specifications subject to change without prior notice.

Accessories

The accessories subject to final delivery.




Multimeter Lead




Alligator Clip (optional)



Multi-function Test Bench



K-type Thermocouple



User's Manual

Manual